


Momentum - Healthcare Vinyl Collections

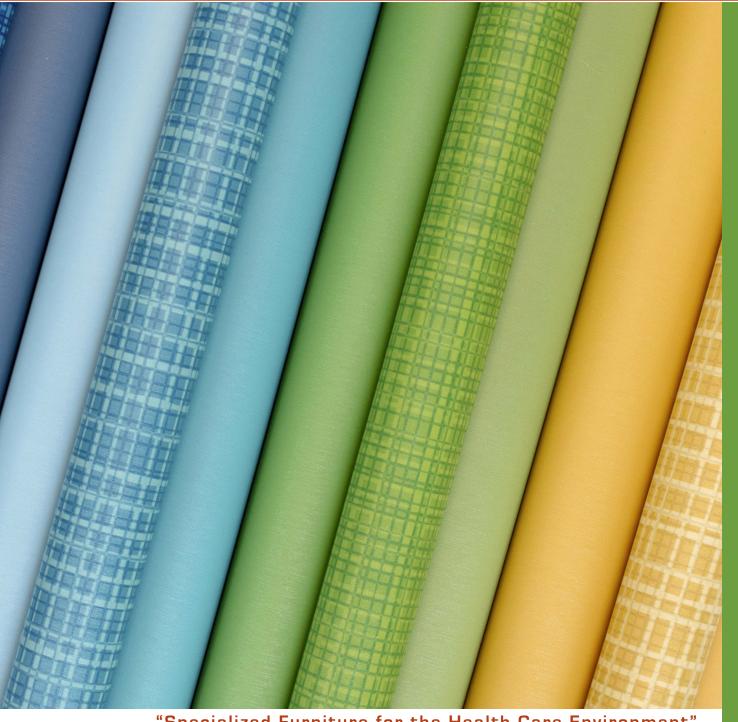

"Specialized Furniture for the Health Care Environment"
www.specialtyfurniture.ca

Table of Contents

PRODUCT	PAGE
STANDARD VINYLS	3
CARSON	3
GRADE 2 VINYLS	4-8
BEELINE	4
CANTER	5-6
EVO	7-8
GRADE 3 VINYLS	9-19
ARTISNAL	9
CORDOVAN	10
HYDE	11
KEEPER	12
LASANNA	13
LINEN	14
NATIVE	15
SANYA	16
TRIBECA	17
VANGUARD	18
WITZEL	19
VINIVI CDECIFICATIONIC	20



MOMENTUM





BEELINE





CANTER



CANTER





EVO







ARTISANAL



CORDOVAN





HYDE



KEEPER





LASANNA



LINEN





NATIVE



SANYA





TRIBECA



VANGUARD





WITZEL



PROPERTIES AND CHARACTERISTICS

Width-Pattern	Fiber Content	Finish	Abrasion (D.R.)	Light- fastness	Cleaning Code
54" EVO CV	100% Clean Vinyl / Phthalate Free Polyester Backing	Protective Topcoat	1,000,000	(Cl. 4) 200 Hrs.	WS Bleach Cleanable (10:1)
54" TRIBECA CV	100% Clean Vinyl / Phthalate Free Polyester Backing	Protective Topcoat	100,000	(Cl. 4) 200 Hrs.	W Bleach Cleanable (10:1)
54"VANGUARD CV	100% Clean Vinyl / Phthalate Free Polyester Backing	Protective Topcoat	100,000	(Cl. 4) 200 Hrs.	W Bleach Cleanable (10:1)

54" Pattern	Fiber Content	Finish	Abrasion (D.R.)	Light- fastness	Approx. Repeats	Cleaning Code
BEELINE	100% Polyurethane / PVC Free	Anti-microbial, Anti-bacterial	500,000	(Cl. 4.5) 200 Hrs.		W Bleach Cleanable (4:1)
CANTER	100% Polyurethane / PVC Free	Anti-microbial, Anti-bacterial	240,000	(Cl. 4.5) 200 Hrs.		W Bleach Cleanable (4:1)
ROW ★ * * * *	100% Polyurethane / PVC Free	Anti-microbial, Anti-bacterial	500,000	(Cl. 4.5) 200 Hrs.		W Bleach Cleanable (4:1)
EON	100% Polyurethane / PVC Free	Anti-microbial, Anti-bacterial	500,000	(Cl. 4.5) 200 Hrs.	5/8" L, 5/8" W	W Bleach Cleanable (4:1)

EXPLANATION OF ACT ICONS FOR UPHOLSTERY

FIRE RETARDANCY

Flammability testing determined as fabric's resisstance to burning.



PASSES California 117

COLORFASTNESS TO WET & DRY CROCKING

Colorfastness to wet & dry crocking refers to the rubbing off of color from the fabric onto clothing, hands or other materials and can occur under wet or dry conditions



AATCC 8-1974 Dry Crocking, Class 4 minimum; Wet ® Crocking, Class 3 minimum

COLORFASTNESS TO LIGHT

Colourfastness to light is the degree to which fabric will retain its color when exposed to light.



PASSES

AATCC 16A-1974 or AATCC 16E-1976; Class 4 minimum at 40 hours. R NOTE: Class 4 minimum at 60 hours is reccomended for direct sunlight

PHYSICAL PROPERTIES

3 physical property tests include: brush pill test to determine a fabric's pilling. Breaking/tensile strength is the ability of a fabric to withstand tension without breaking or tearing. Seam slippage is the pulling apart of fabrics at the seams.



PASSES
Brush Pill ASTM 03511, 3-4 minimum
Breaking Strength ASTM 03597-D1682-64 (1975) 50 lbs. minimum in warp & weft
Seam Slippage ASTM 03597-D434-75 25 lbs. minimum in warp & weft

ABRASION

Abrasion is the ability of a fabric to withstand damage from wear and rubbing. There is a general contract specification as well as a heavy duty specification.



PASSES

rubs Wyzenbeek Method



rubs Wyzenbeek Method or ASTM D4966 (with 21 oz. weight); 40,000 rubs Martindale Method

CLEANING CODE DEFINITIONS

W: Water-based foam or cleaner. WS Water-based cleaning agents or foam. BC: Bleach cleanable.

Greenquard Certified.





